



VG-6734 Conventional Souner Strobe

P-Code: 010101040

V-GREAT GLOBAL CORPORATION

Second Floor, Capital City, Independence Avenue, P.O. Box 1008, Victoria, Mahe, Seychelles

FEATURES


- * Audial and visual warning
- * 16 tones available
- * No external power supply required
- * Fast responding time and low power consumption
- * Plug-in structure and easy installation
- * Used in conventional sounder circuit only
- * LPCB approval to EN54-3




DESCRIPTION

VG-6734 Conventional Souner Strobe, is connected with conventional sounder output to provide audible and visual alert of fire alarm. When the sounder output is activated, VG-6734 will generate alarm sound and warning flash, and then can be silenced by manually control on control panel. Moreover, there are 16 tones selectable via the dipswitch. This sounder could be connected with conventional sounder output only, either from control panel or interface.

DIMENSION

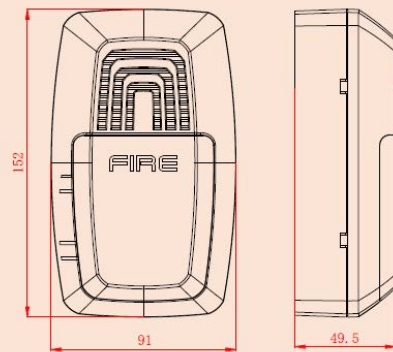

WIRING INSTRUCTION

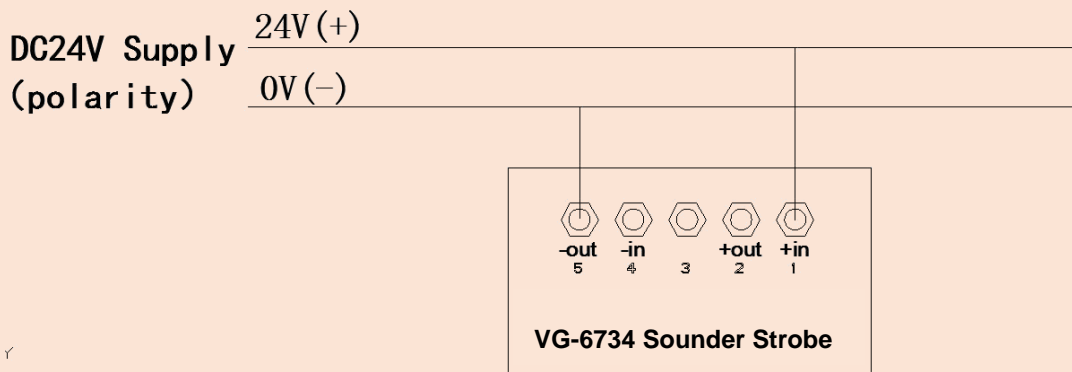

TECHNICAL DATA

Operating Voltage	20VDC~28VDC	Temperature	-10°C~+50°C
Action Current	≤50mA	Humidity	≤95%, non condensing
Flashing Frequency	1.4x(1±20%)Hz	Alarm Tone	16 types
Material of Enclosure	ABS	IP Rating	21C
Dimension (LxWxH)	152mmX91mmX49.5mm	Weight	210g