


## Loop Powered Interfaces

Vigilon can accommodate a high quantity of loop powered interface units offering flexible range of inputs and outputs from the FD&A system from plant control and signalling other systems in a fire, to linking with other emergency management systems such as sprinklers or security systems.

Loop powered interfaces offer a cost effective solution with each device individually addressed increasing the overall management capability of the FD&A system.

Interfaces are either powered from the loop or require a separate mains supply. The mains power version has its own battery backup.

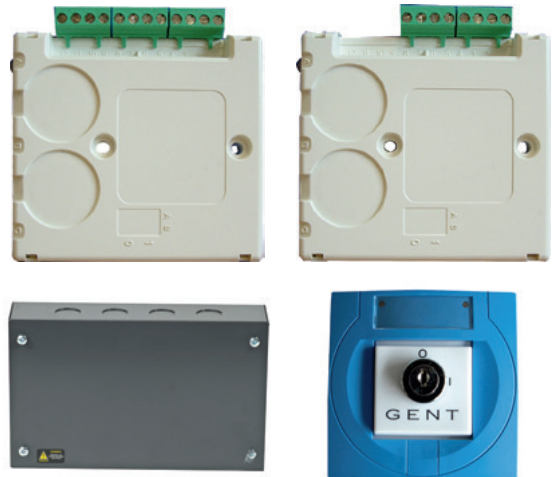

### Description

*Vigilon's range of loop powered interfaces offer a comprehensive range of connectivity options with critical plant and other safety systems.*

## KEY FEATURES


- Loop Powered devices reducing cost of installation and maintenance
- Individual addresses to maximise information and flexible cause and effect
- Each device with EN54-17 short circuit handling for enhanced system integrity
- Comprehensive range of functionality in each device variant to simplify system design
- Complete range of mounting enclosures and accessories
- Options to connect conventional fire detectors such as flame and beam detectors
- Certified to EN54-17 and EN54-18

# Loop Powered Interfaces Technical Specifications

ORDER CODES	
<b>LOOP POWERED LOW VOLTAGE INTERFACES</b>	
SINGLE CHANNEL INTERFACE, LV INPUT ONLY (NO ENCLOSURE)	S4-34410
<b>LV INTERFACE 1 OUTPUT &amp; 1 INPUT (NO ENCLOSURE)</b>	<b>S4-34420</b>
4 CHANNEL INTERFACE (INPUT/OUTPUT) (NO ENCLOSURE)	S4-34450
<b>LOOP POWERED MAINS SWITCHING INTERFACES</b>	
SINGLE CHANNEL OUTPUT ONLY INTERFACE C/W RELAY AND ENCLOSURE	S4-34415
SINGLE CHANNEL OUTPUT ONLY INTERFACE C/W RELAY - DIN MOUNTING	S4-34411
SINGLE CHANNEL MAINS SWITCHING INTERFACE C/W ENCLOSURE	S4-34401
FOUR CHANNEL MAINS SWITCHING INTERFACE C/W ENCLOSURE	S4-34404
<b>KEY SWITCH INTERFACE SINGLE CHANNEL</b>	
KEY SWITCH INTERFACE SINGLE C/W BLUE ENCLOSURE	S4-34418
<b>SUPERVISORY INPUT</b>	
12 INPUT INTERFACE MODULE SUPERVISORY INPUTS ONLY	S4-34412
CONNECTION CONVERTOR FOR S4-34412 AND S4-34600 26 CORE RIBBON TO TERMINAL BLOCK	S4-34494
<b>INTERFACE HOUSINGS AND MOUNTING ACCESSORIES</b>	
INTERFACE ENCLOSURE LARGE PLASTIC	S4-34490
INTERFACE ENCLOSURE SMALL METAL WITH 20MM AND 25MM KNOCKOUT	S4-34492
PACK OF 5 DIN RAIL BRACKETS FOR LV INTERFACE	S4-34491
INTERFACE ENCLOSURE SMALL PLASTIC SURFACE MOUNT BOX	M200E-SMB
INTERFACE ENCLOSE PLASTIC HOUSES 6 INTERFACES	S4-34496

SPECIFICATION					
TYPE	Low Voltage Input/Output Range			Output Interface (Mains)	Key Operated Interface
	Single Input S4-34410	Four Channel Input/Output (I/O) S4-34450	Single Input/Output S4-34420	Single Channel Interface S4-34415 / S4-34411	Supervisory Inputs only S4-34418
APPROX WEIGHT (EXCLUDING ENCLOSURE)	92g	100g	100g	DIN mountable: 138g PCB with cover in metal box: 800g	110g
OPERATING TEMPERATURE	-10°C to +60°C			-25°C to +70°C	
RELATIVE HUMIDITY	Up to 95% - Temperature +5°C to +45°C (Non condensing)				
INGRESS PROTECTION	IP31 for plastic box S4-34490 IP40 estimated for metal box S4-34492		IP40 for metal box (estimated)	IP43	
DEVICE LOAD FACTOR	Load Factor 1-4 switch inputs = 1 (maximum 200 per loop) 1-4 relay outputs = 2 (maximum 200 per loop only 8 individually sectored) Zone Input = 26 (maximum 30 per loop) Every LED output = + 5 (maximum 100 LED outputs per loop)		5 (maximum 200 devices per loop)	11	
PANEL COMPATIBILITY	Compatible with Loop = V3.93 / V4.35 and Main Control Card = V3.94 / V4.37				
APPROVALS	Approval EN54-17: 2005 and EN54-18: 2005 LPCB				

## Dimensions (mm)

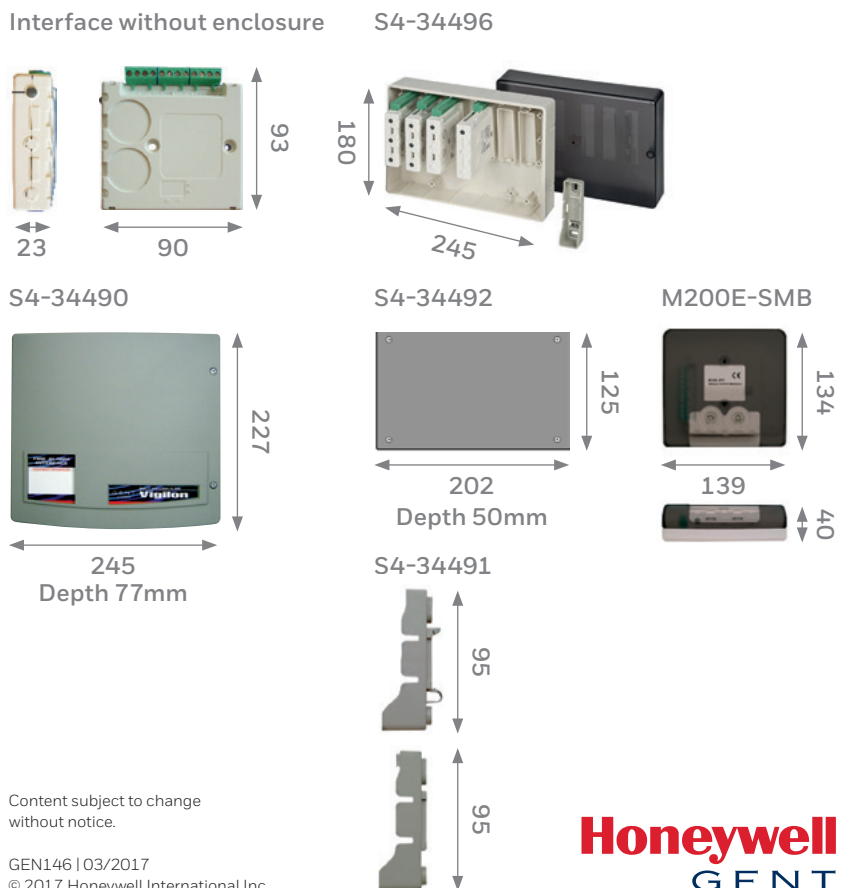

### For more information

[www.gent.co.uk](http://www.gent.co.uk)

### Honeywell Gent

140 Waterside Road  
Hamilton Industrial Park,  
Leicester, LE5 1TN  
Telephone: 0116 246 2042  
E-mail: [gentenquiry@honeywell.com](mailto:gentenquiry@honeywell.com)

Content subject to change without notice.

GEN146 | 03/2017  
© 2017 Honeywell International Inc.

**Honeywell**  
GENT