


The AW-D135C conventional manual call point is designed to be use with an intelligent two-wire control system. If it is pressed after a fire is manually confirmed, an alarm signal may be sent to a fire alarm control system which will, after receiving the alarm signal, display the equipment status of the manual call points. When the manual call point is operating normally, the red indicator will blink; when there is a fire alarm, it will remain lit.



Features

- ✓ Semi-flush or surface mounting
- ✓ Simple key to reset operating element (no broken glass)
- ✓ LED indicator
- ✓ Complete functional test with every activation
- ✓ Meets all requirements of latest EN54 part 11

Installation

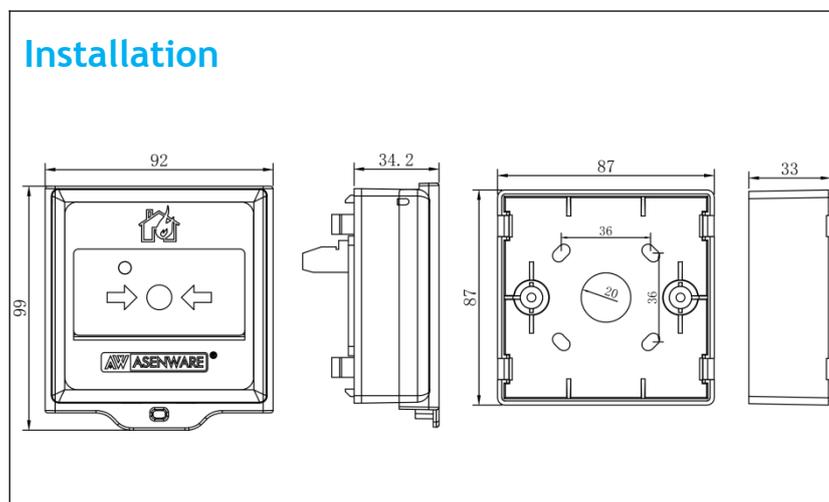

Technical Specification

Model	AW-D135C
Main Voltage	Zone 24V or 12V
Operating current	monitoring status $\leq 20\mu\text{A}$, alarm status $\leq 15\text{mA}$
Application	For indoor use only
Wiring	The promise of two bus system(Zone +, Zone -)
Protection class	IP30
Indicator	Red alarm indicator flashes when it is under normal condition, press the manual button lit work
Environmental	Class A temperature range: -5 to 40°C ($23\sim 104^{\circ}\text{F}$) Humidity: 5 to 95% RH, non-condensing
Materials and colors	ABS, red
Mating Panel	AW-CFP2166 fire alarm control panel
Size	99mm* 92mm* 66mm(with cover)
Weight	about 95g