
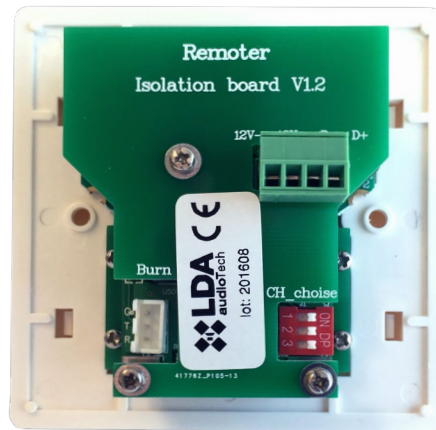


VCC-64

Volume and Channel Control

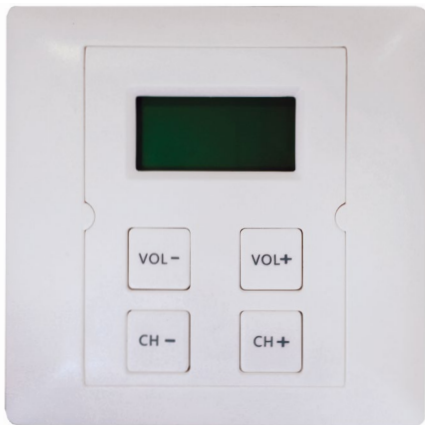

The VCC-64 allows up to 99 programmable channels and volume control (0-9). Usually installed in local zone and connected via bus to the system, it offers source selection, volume control and lock function.

Key features of VCC-64:

- Installation in local zone and connected via bus to the system.
- 99 programmable channels
- Volume control (0-9).
- Bus RS-485
- 4 P terminal block.
- DIP switch.
- LCD Display of 2x8 character type.

Technical specifications

Model	VCC-64
Reference	590.001.012
Power supply	12V DC
Consumption	1,2W max. (100mA)
Bus	RS-485 connects to the System's interface, the maximum communication distance is 1 200m (the maximum distance to the power supply is 500m) 4P Terminal Board.
Channel setting	DIP switch
Display	2x8 characters LCD
Environmental Conditions	Temperature -5 to 55°C, relative humidity 15%–80%. Anti-interference, confirms EN 5 5103-2, CE, CCC certified.
Dimension	86 x 56 x 40 mm (width x high x long)
Appearance	ABS Material, White
Weight	110g