


产品规格书
PRODUCT DATASHEET


产品规格 PRODUCT SPEC	产品名称 Product Name	Emergency Downlight
	产品型号 Product Model	BY-Z1005S
	电池 Battery	LiFePO4 / 3.2V 3000mAh
	充电时间 Charge Time	16H
	应急时间 Emergency Duration	3H
	PCB 材质 PCB Type	FR4/1.2mm
	自容式或中央供电式 Self-contained or central power	Self-Contained
	外壳/颜色 Case/color	White
	视距 Viewing Distance	/
	外壳防护等级 Degree of Protection	IP20
	灯具等级 Classification of Luminaires	Class II
	认证标准 Certification Standard	IEC60598-2-22
	使用温度 Operation Temperature	0-40 °C
	质保期 Warranty (Years)	1Year
电气特性 ELECTRICAL	输入电压 Input Voltage	AC220-240V
	电源频率 Frequency	50/60Hz
	输入功率 Input Power	5.5W
	操作模式 Operation Mode	Maintained / Non-Maintained
	应急功率 Emergency Power	4W

	LED 封装型号 LED Package Type	3535
	LED 数量 LED Qty	1pcs
	色温 Correlated Color Temperature	6500k
	光通量 (市电) Luminance Flux	$\geq 250\text{lm}$
	光通量(应急) Emergency Luminance Flux	$\geq 250\text{lm}$
	配光曲线 PHOTOMETRIC DATA	D50
结构特性 STRUCTURAL	显色指数 Color Render Index	≥ 70
	产品外型尺寸 Dimension(mm)	$\Phi 140*36$
	安装型式 Mounting Type	Recessed
	灯罩材质 Cover Material	PC
	灯体材质 Housing Material	PC+6063
	产品净重 Net Weight	0.29kg

产品图片 PRODUCT IMAGE

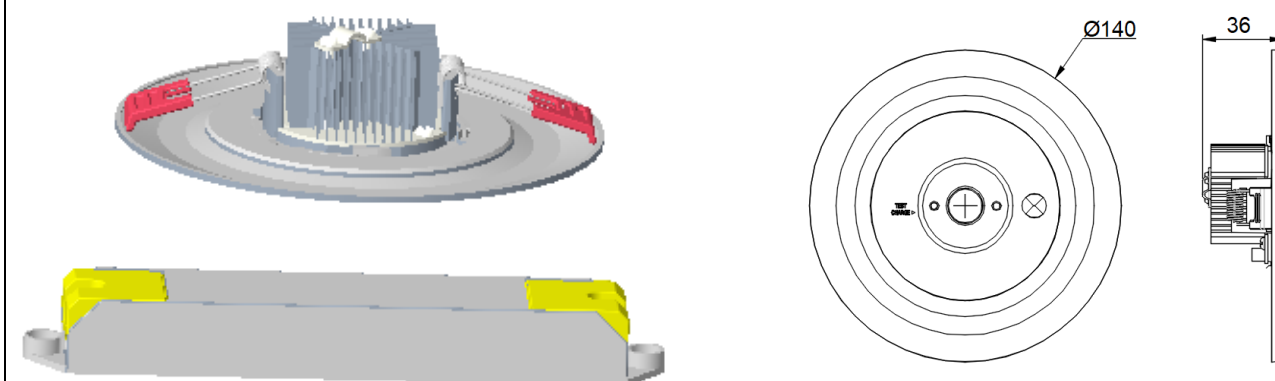

安装图 INSTALLATION DRAWING

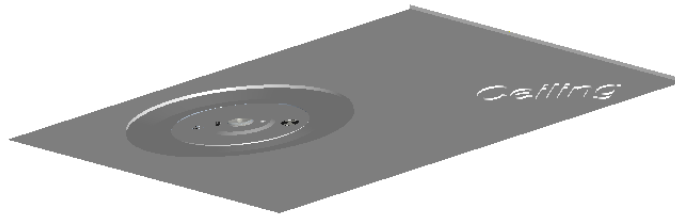

编制 Prepared By